
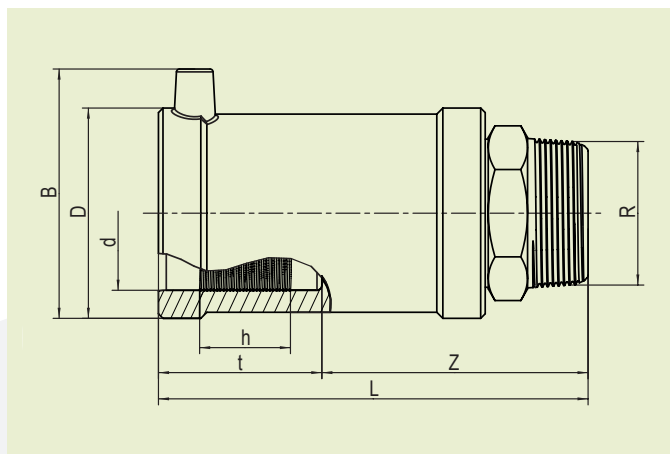


FRIALEN® RACCORDS DE SÉCURITÉ

MUN-V2A Raccords de passage PE-HD/V2A avec filetage mâle

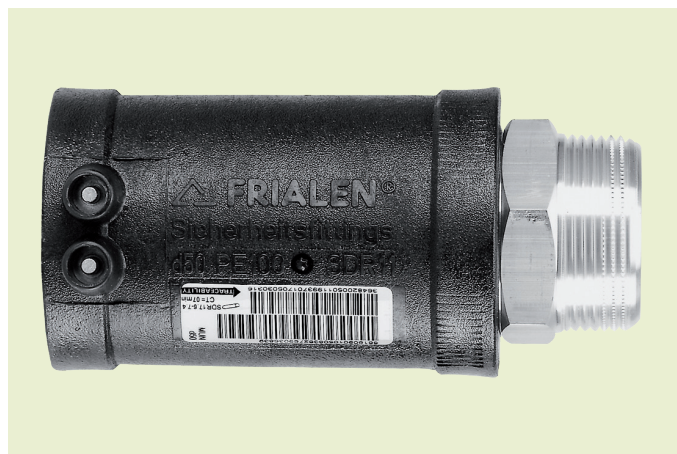


PE 100 SDR 11

Pression de service max. 16 bar (eau)



d	R	No. de commande	CHF/ pièce	UE	PE	D	L	t	z	h	B	Poids kg/pce
40	1"	616516	81.00	20	1000	58	123	45,5	75	30	69,5	0,460
40	1 1/2"	612727	89.00	20	1000	58	127	45,5	78	30	69,5	0,495
50	1 1/2"	612726	85.00	15	750	70	137	53	84	29,8	80	0,600
63	1 1/2"	612705	116.00	10	500	84	137	53	84	35	93,5	0,865
63	2"	612899	122.00	10	500	84	142	53	89	35	93,5	0,910

WUN-V2A 90° Coude d'adaptation à 90° PE-HD/V2A avec filetage mâle

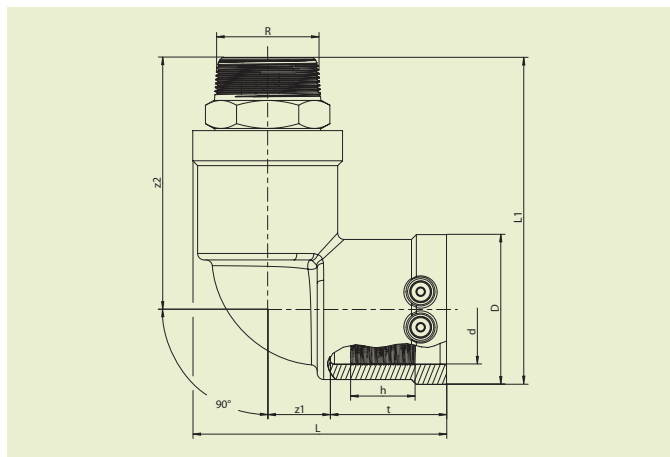

PE 100 SDR 11

Pression de service max. 16 bar (eau)



d	R	No. de commande	CHF/ pièce	UE	PE	D	L	t	z ₁	z ₂	h	Poids kg/pce
40	1"	616514	87.00	15	750	58	102	45,5	27	101	30	0,540
40	1 1/2"	612148	98.00	15	750	58	102	45,5	27	104	30	0,535
50	1 1/2"	612118	98.00	10	500	70	118	53	30	113	29,8	0,650
63	1 1/2"	612186	127.00	10	320	84	128	53	33	116	35	0,980
63	2"	616515	126.00	10	320	84	128	53	33	121	35	0,950